


Technical Information: Alkaline Manganese Batteries

LR14 Standard

■ Dimension

		JIS/min
h1	Overall height	Max. 50.0 Min.(48.6)
d6	Outer diameter of the negative contact range	Min. 13.0
h4	Recess of negative contact from enclosure	Max. 0.9
d3	Diameter of the positive contact	Max. 7.5 Min. (5.5)
h3	Height of the proected flat contact form the next higher	Min. 1.5
d1	Diameter	Max. 26.2 Min. 24.0

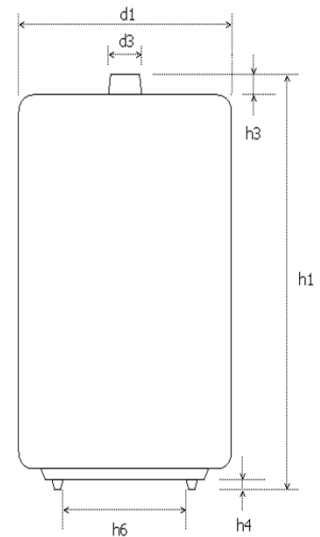

■ Rating

Type designation	LR14 Standard	
Norminal Voltage	1.5V	
Weight	65g	
Typical capacity	7,500mAH (40Ω Cont. Discharge)	
Outer dimentsion	Height 49.6mm	
	Diameter 25.6mm	
Average Dyratuib @ 20°C (Not guranteed peromance)	400mA 2hr/day(0.9V) Portable stereo	10.5hr
	20 Ω 4hr/day(0.9V) Radio	110hr
	3.9 Ω 1hr/day(0.8V) Toy	19hr

Note) Value in parentheses is end point voltage of each discharge

■ Discharging curve

