

POWER-XTRA

Model : Power-Xtra 1.2V Ni-Cd SC 1500 Mah Rechargeable Battery (Paper/Flat) Ver: A8 NO:900.600.503.216

Product Specification

Name :	<u>Power-Xtra Ni-Cd Battery</u>
Model:	<u>PX-KSC1500-1.2V</u>
Stock Code:	<u>900.600.503.216</u>
Author:	<u></u>
Review:	<u></u>
Approval:	<u></u>

POWER-XTRA

Model : Power-Xtra 1.2V Ni-Cd SC 1500 Mah Rechargeable Battery (Paper/Flat) Ver: A8 NO:900.600.503.216

1、APPLICATION

Model : Ni-CdPX-KSC1500-1.2V

Cell Size: SC ($\phi 23.0^{+0.1} \times 43.0^{+0.15}$)

2、DATA OF STACK UP BATTERIES

All data involves voltage and weight to stack-up battery are equal to the value of unit cell times the number of unit cell which consisted in the stack-up batteries

Example:

Stack-up battery consisting three unit cells

Nominal voltage of unit cell=1.2V

Nominal voltage of stack-up batteries=1.2V×3=3.6V

3、RATINGS

Description	Unit	Specification	Conditions	
Nominal Voltage	V	1.2		
Nominal Capacity	mAh	1500	Standard Charge/Discharge	
Standard Charge	mA	150(0.1C)	Ambient Temperature: Ta= 20±5°C	
	Hour	16		
Trickle Charge		(0.03C)~(0.05C)	Ta= 0~45°C	
Standard discharge	mA	300(0.2C)	Ambient Temperature: Ta= 20±5°C Humidity: Max: 85%	
DischargeCut-off Voltage	V	1.0		
Operating temperature range	°C	0~45°C	Humidity: Max : 85%	
Storage Temperature	°C	-20~35°C	一年	Fully charged state、 Humidity、 Max.60%
		0~60°C	一周	Fully charged state、 Humidity、 Max.80%
Typical Weight	g	Approx.40.0g		

POWER-XTRA

Model : Power-Xtra 1.2V Ni-Cd SC 1500 Mah Rechargeable Battery (Paper/Flat) Ver: A8 NO:900.600.503.216

4、 PERFORMANCE

Unless otherwise stated, tests should be done within one month of delivery under the following conditions:/

Ambient Temperature, T: 20±5°C

Relative Humidity: 65±20%

Test	Unit	Specification	Other Condition	Remarks/
Capacity/	mAh	≥1800	Standard Charge Discharge	up to 3 cycles are allowed
Open Circuit Voltage(OCV)/ 开路电压	V	≥1.25	Within 1 hour after standard Charge	
Internal Impedance	mΩ/ Cell	≤25	Upon fully charge(1KHz)/	
High Rate Discharge(0.5C)	minute	≥96	Standard Charge, 1 hour rest Before Dischargeby0.5Cto1.0 V	up to 3 cycles are allowed
Overcharge		No leakage nor explosion	0.1CCharge14 days	
Charge Retention	mAh	≥975(65%)	Standard Charge, Storage:7 day rest at 45°C Ambient Temperature, Standard Discharge	
IEC Cycle Life	Cycle	≥500	IEC61951-1(2003)7.4.1.1	(see Note 4)
Leakage Test		No leakage nor deformation	Fully charged at0.5C for 2.5 hour stand for 14 days.	
Security Test		No explosion, but leakage or deformation is allowed	Charge the cell 0.1C 16hrs, Then≤100 mΩImpedance short circuit for 1hour	Ambient Temperature: T=20±5°C
Impact Resistance		Change of voltage should be under 0.02V/ Cell Change of impedance should be under 5 mΩ/ Cell/	Charge the cell 0.1C 16hrs Then leave for 1~4hrs,check battery before/after dropped, Height 50cm Wooden board(thickness30mm) Direction not specified,3 times.	Ambient Temperature: T=20±5°C
Vibration Resistance		Change of voltage should be under 0.02V/cell, Change of impedance should be under5 milliohm/cell/	Charge the battery 0.1C 16hrs, then leave for 24hrs,check Battery before/after vibration, Amplitude 1.5mmVibration 3000 CPM, Any direction for 60mins.	Ambient Temperature: T=20±5°C

POWER-XTRA

Model : Power-Xtra 1.2V Ni-Cd SC 1500 Mah Rechargeable Battery (Paper/Flat) Ver: A8 NO:900.600.503.216

5、 CONFIGURATION,DIMENSIONS AND PACKINGS

Please refer to the attached drawing.

6、 EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage nor deformation.

7、 CAUTION

- 1) Reverse charging is not acceptable.
- 2) Charge before use. The cells/batteries are delivered in an uncharged state.
- 3) Do not charge/discharge with more than our specified current.
- 4) Do not short circuit the cell/battery Permanent damage to the cell/battery may result.
- 5) Do not incinerate or mutilate the cell/battery.
- 6) Do not solder directly to the cell/battery.
- 7) The life expectancy may be reduced if the cell/battery is subjected adverse conditions like: extreme temperature, deep cycling, excessive overcharge/ over-discharge
- 8) Store the cell/battery uncharged in a cool dry place. Always discharge batteries before bulk storage or shipment

Notes:

- 1) T_1 : Ambient Temperature.
- 2) Approximate charge time from discharged state is for reference only
- 3) We recommend cells or batteries are charged and discharged at least once every 6 months
- 4) IEC61951-1(2003)7.4.1.1 Cycle Life:

Cycle No.	Charge	Rest	Discharge
1	0.1C×16h	None	0.25C×2h20min
2-48	0.25C×3h10min	None	0.25C×2h20min
49	0.25C×3h10min	None	0.25C to 1.0V/ cell
50	0.1C×16h	1-4h	0.2C to 1.0V/ cell
Cycles 1 to 50 shall be repeated until the discharge duration on any 50th			


8、 Other/

- 1) The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty.
- 2) Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

POWER-XTRA

Model : Power-Xtra 1.2V Ni-Cd SC 1500 Mah Rechargeable Battery (Paper/Flat) Ver: A8 NO:900.600.503.216

9、 Attached Drawing

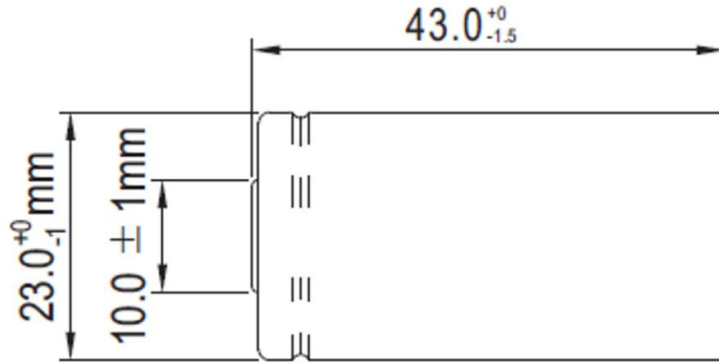

NO	NAME	SIZE	QTY	NOTE		
1	CELLS	SC1500MAH	1	NI-CD		
2	PAPER COVERS	22.1*41.5*0.3MM	1	KRAFT PAPER		
3	SURFACMAT	SC (φ21mm)	1	WHITE		
4					MODEL	
5					DESIGN BY	
6					CHECKER	
7					VERSION	

Image

