

900.869.503.210

## PX502440 3.0V 1200 mAh Li-MnO<sub>2</sub> Lithium Battery

\*\*Non-Rechargeable

### Key Features:

- Nominal Voltage 3.0V
- Energy Density up to 450Wh/kg
- High Safety
- No Passivation
- Long Shelf Life
- UL, UN38.3 and RoHS Certified



### Main Applications:

- Security System
- Smart Metering
- RFID Devices
- Medical Devices
- GPS Tracking System
- Wireless Transmitting
- Smart Home Devices
- UPS for Data Recording

### Characteristics (23±2°C, in 1 year)

Open Circuit Voltage	≥3.1V
----------------------	-------

Nominal Capacity	1200mAh
------------------	---------

*Battery discharged at continuous current 1mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage*

Maximum Continuous Current	300mA
----------------------------	-------

*Battery discharged for minimum 50% of rated capacity*

Maximum Pulse Discharge Current	500mA
---------------------------------	-------

*Battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break*

Dimensions	Refer to page 2
------------	-----------------

Weight	9.0g
--------	------


Lithium Content	0.35g
-----------------	-------

Storage Condition	Temperature ≤ 30°C
-------------------	--------------------

	Humidity ≤ 75%RH
--	------------------

Operating Temperature	- 40~+70°C
-----------------------	------------

Self-discharge Rate	≤2%
---------------------	-----

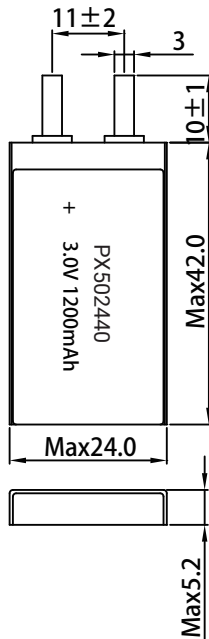

Warning:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C

