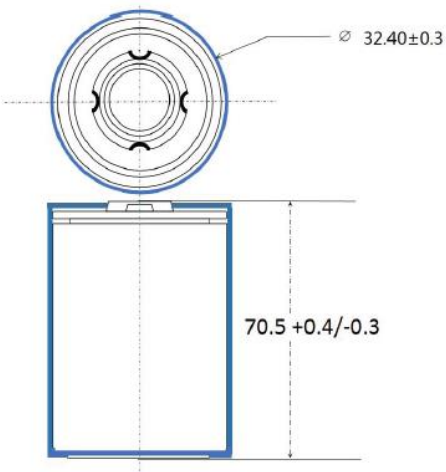


Model: IFR32700 - 3.2V 6000 mAh - 3C**Stock Code:** 900.600.503.384

Item	Specifications		Conditions
Rated Capacity	Nominal	6000mAh	Standard Charge: 1C
Nominal Voltage	3.2V		
End of Charge Voltage	3.65V		CC Mode
End of Charge Current	$\leq 0.3A$		CV Mode
End of Discharge Voltage	2.0V		CC Mode
Max Continuous Discharge Current	18A		$\leq 20\text{min}$
Max Pulse Discharging Current	60A		3s
Suggested Charging Temperature	$\leq 0^{\circ}\text{C}$		Prohibit Charging
	0~10 $^{\circ}\text{C}$		$\leq 0.2^{\circ}\text{C}$
	0~15 $^{\circ}\text{C}$		$\leq 0.5^{\circ}\text{C}$
	15~45 $^{\circ}\text{C}$		$\leq 1^{\circ}\text{C}$
	45~60 $^{\circ}\text{C}$		$\leq 0.5^{\circ}\text{C}$
Discharging Temperature	-20~60 $^{\circ}\text{C}$		1C
Storage Temperature	-20~45 $^{\circ}\text{C}$		
Cycle Life	2200 Times		1C 100% DOD

Model: IFR32700 - 3.2V 6000 mAh - 3C
Stock Code: 900.600.503.384

Item	Specifications	Representative Image
Height	70.5+0.4mm/-0.3mm	 The technical drawing shows two views of the battery. The top view is a circular cross-section with a diameter dimension of $\varnothing 32.40 \pm 0.3$. The side view is a rectangular profile with a height dimension of $70.5 + 0.4 / - 0.3$.
Diameter	32.4mm $\pm$ 0.3mm	
Weight	140 $\pm$ 5g	