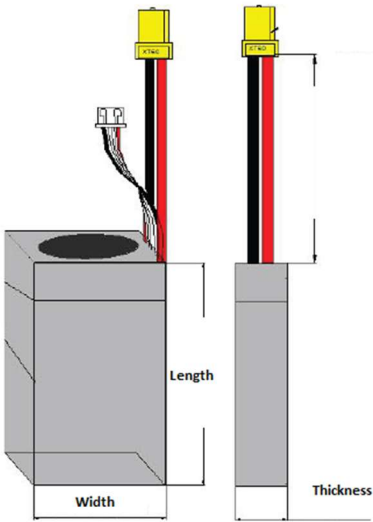


Model: Power-Xtra PX1300XL3S - 3S1P - 11.1V 1300 mAh Li-Polymer Battery -20C

Stock Code: 900.869.503.297

Item	Specifications	Conditions
Nominal Voltage	11.1V±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	12.6V±0.05V
Typ. Capacity	1.300 mAh	0.2C Discharge cut-off Voltage 9.0V after standard charge at 23±2°C
Maximum Charge Voltage	12.6V	4.2V/Cell
Configuration	3S1P	
Standard Charging Current	1.300 mA	1.0C
Standard Discharging Current	1.300 mA	1.0C
Maximum Charging Current	2.600 mA	2.0C
Max. Constant Discharge Current	26 A	20.0C - Ref.Temperature:10-45°C
Max. Burst Discharge Current	39 A	30.0C ≤3S
Discharge Cut-Off Voltage	9.0V	
Temperature	Charge	0 to +10°C
		10 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20-25°C
		less than 3 months: -20-30°C
		less than 1 months: -20-45°C
Weight	115 gr	approximately
Cycles Test	Measure the capacity under the following cycle conditions until the cycle life ends when the three discharge capacity ≤80%, Cycle conditions: Standard Charge , rest for 30min;Discharge at 1C to 9V cut-off , Testingtemperature is 23±2°C. Cycle Life≥300 cycles	

Model: Power-Xtra PX1300XL3S - 3S1P - 11.1V 1300 mAh Li-Polymer Battery -20C
Stock Code: 900.869.503.297

Item	Description	Dimension	Technical Drawing
T	Thickness	21.0± 0.2 mm	
W	Width	36.0± 1 mm	
L	Length	74.0± 1 mm	
BP	Balance Plug	JST-XHP-4P	
DP	Discharge Plug:	XT60	

Image

