



# HUANYU

# SPECIFICATIONS

HUANYU MODEL No.	:	<u>HYCP4/5SC1300N</u>
CUSTOMER MODEL No.	:	<u></u>
DATE OF ISSUE	:	<u>May 27, 2016</u>
VERSION No.	:	<u>1</u>

**The Supplier:**

**HUANYU POWER SOURCE CO.,LTD**

**Drawn : Guo Huifang**

**Check : Tang Zhaohua**

**Approved : Cheng Shuguo**

**The Customer:**

**Customer Approved:**




## 1. APPLICATION

The specification applies to the following sealed Ni-Cd rechargeable battery made by HUANYU.

TYPE: HYCP4/5SC1300N APPLICATION: Electric tools, Electric toys, Etc

## 2. WORKING THEORY

The negative of HUANYU Nickel-Cadmium cylindrical battery is metal of Cadmium, the positive is NiOOH, and the electrolyte is KOH of high purity. The electrochemical processes are represented by the following reactions:



During discharge, Cadmium of negative is oxidized to  $\text{Cd(OH)}_2$ . The free electrons flow into the positive through the external circuit, NiOOH of positive receives the electrons and is deoxidized to  $\text{Ni(OH)}_2$ . Charge process is just the opposition of discharge.

## 3. CELL TYPE AND RATINGS

Cell	Ni-Cd Sealed Cylindrical Cell
Type	HYCP4/5SC1300N
Size type	4/5SC1300
Rated capacity	1300mAh/0.2I <sub>t</sub> A
Nominal cell voltage	1.2V
Weight of the single cell	39g
Diameter	23.0 <sup>0</sup> <sub>-1.0</sub> mm
Height	34.0 <sup>0</sup> <sub>-1.5</sub> mm

## 4. BEST EXPLOITATION CONDITIONS

Charge current	260mA (0.2I <sub>t</sub> A×7.5h) ≤ I ≤ 520mA (0.4I <sub>t</sub> A×3.5h)
Charge control method	Time、TCO=45℃
Temperature range for charge	15℃～25℃
Humidity	45%～85%
Discharge current	130mA (0.1I <sub>t</sub> A) ≤ I ≤ 6.5A (5I <sub>t</sub> A)
Temperature range for discharge	15℃～25℃
Temperature range for storage	0℃～25℃

**5. PERMISSION EXPLOITATION CONDITIONS**

<b>Low rate charge</b>	
Current	$130\text{mA} (0.1I_t \times 16\text{h}) \leq I < 520\text{mA} (0.4I_t \times 3.5\text{h})$
Control method	Time, $\text{TCO}=45^\circ\text{C}$
Ambient temperature	$10^\circ\text{C} \sim 30^\circ\text{C}$
Humidity	45%~85%
<b>High rate charge</b>	
Current	$520\text{mA} (0.4I_t \times 3.5\text{h}) < I \leq 1300\text{mA} (1I_t \times 1.25\text{h})$
Control method	$-\Delta V=10\text{mV/cell}$ , Time, $dT/dt=1^\circ\text{C}/3\text{min} \sim 2^\circ\text{C}/3\text{min}$ , $\text{TCO}=45^\circ\text{C}$
Ambient temperature	$10^\circ\text{C} \sim 30^\circ\text{C}$
Humidity	45%~85%
<b>Discharge</b>	
Can be recycled continues discharge current	$130\text{mA} (0.1I_t) \leq I \leq 13\text{A} (10I_t)$
Cut-off voltage	$1.0\text{V/cell} (I \leq 1I_t)$ $0.9\text{V/cell} (1I_t < I \leq 2I_t)$ $0.8\text{V/cell} (2I_t < I \leq 5I_t)$ $0.7\text{ V/cell} (5I_t < I \leq 10I_t)$
Ambient temperature	$-20^\circ\text{C} \sim 55^\circ\text{C} (I \leq 0.2I_t)$ $-10^\circ\text{C} \sim 40^\circ\text{C} (0.2I_t < I \leq 1I_t)$ $0^\circ\text{C} \sim 30^\circ\text{C} (1I_t < I \leq 5I_t)$ $15^\circ\text{C} \sim 25^\circ\text{C} (5I_t < I \leq 10I_t)$
Humidity	45%~85%
<b>Storage</b>	
Within a week	$-20^\circ\text{C} \sim 35^\circ\text{C}$
Within six months	$-20^\circ\text{C} \sim 25^\circ\text{C}$
Humidity	45%~85%

## 6. PERFORMANCE

### 6.1 TEST CONDITIONS

The test is carried out with new batteries (within one month after delivery). Before it is charged, the battery should be discharged at 0.2I<sub>A</sub> to an end of voltage of 1.0V/cell under test conditions:

Temperature	:	20°C ± 5°C
Relative Humidity	:	45%~85%
Standard charge	:	260mA (0.2I <sub>A</sub> ) × 75h
Standard discharge	:	260mA (0.2I <sub>A</sub> ) to 1.0V/cell

### 6.2 TEST METHOD & PERFORMANCE

Test	Unit	Specification	Conditions	Remarks
Shipment Voltage	V/cell	≥0.8		AQL II =0.65%
Open Circuit Voltage (OCV)	V/cell	≥1.3	In 1h after standard charge	
Internal impedance	mΩ/cell	≤14	Upon fully charge (1KHz)	
1I <sub>A</sub> Discharge	min	≥54	Standard charge before discharge	End Voltage is 1.0V/cell
5I <sub>A</sub> Discharge	min	≥9	Standard charge before discharge	End Voltage is 0.8V/cell
10I <sub>A</sub> Discharge	min	≥4	Standard charge before discharge	End Voltage is 0.7V/cell
Over charge	min	≥300 No leakage No deformation	0.1I <sub>A</sub> charge 28d, and rest for 1h~4h, then discharge at 0.2I <sub>A</sub> to 1.0V/cell	Temp. 20°C ± 5°C
Charge retention	mAh	≥845 (65%CN)	Standard charge, Storage of 28d, Standard discharge	Temp. 20°C ± 2°C
Cycle life	Cycle	≥500	EC61951-1(7.5.1.2) GB/T 22084.1-2008	Refer to <b>Note</b>
Leakage		No leakage No deformation	Fully charge at 0.4I <sub>A</sub> , then storage of 14d	Temp. 20°C ± 5°C

**Cycle life:**

Prior to the endurance in cycles test, the cell shall be discharged at a constant current of 0.2 I<sub>r</sub>A to a final voltage of 1.0 V/cell.

The following endurance test shall then be carried out, irrespective of cell designation, in an ambient temperature of 20 °C ± 5 °C. Precautions shall be taken to prevent the cell-case temperature from rising above 35 °C during the test, by providing a forced air draught if necessary.

**Note :** IEC61951-1 (7.5.1.2):

Cycle number	Charge	Stand in charged condition	Discharge
1	0.1I <sub>r</sub> A for 16h	None	0.25I <sub>r</sub> A for 2h20min <sup>a</sup>
2-48	0.25I <sub>r</sub> A for 3h10min	Note	0.25I <sub>r</sub> A for 2h20min <sup>a</sup>
49	0.25I <sub>r</sub> A for 3h10min	Note	0.25I <sub>r</sub> A to 1.0V
50	0.1I <sub>r</sub> A for 16h	1h to 4h	0.20I <sub>r</sub> A to 1.0V <sup>b</sup>

a. If the cell voltage drops below 1.0V, the discharge may be discontinued.  
b. It is permissible to allow sufficient open-circuit rest time after the completion of discharge at cycle 50, so as to start cycle 51 at a convenient time. A similar procedure may be adopted at cycles 100, 150, 250, 300, 350, 400 and 450.

Cycles 1 to 50 shall be repeated until the discharge duration on any 50th cycle become less than 3 h. At this stage, a repeat capacity measurement as specified for cycle 50 shall be carried out.

The endurance test is considered complete when two such successive capacity cycles give a discharge duration of less than 3 h. The total number of cycles obtained when the test is completed shall be not less than 500.

**6.3 Storage:**

Prior to this test, the cell shall be discharged, in an ambient temperature of 20 °C ± 5 °C, at a constant current of 0.2 I<sub>r</sub>A, to a final voltage of 1.0 V/cell. It shall then be charged of 0.1 I<sub>r</sub>A for 16h. The cell shall then be stored on open circuit for 12 months.

After completion of the storage period, the cell shall be discharged in an ambient temperature of 20 °C ± 5 °C, at a constant current of 0.2 I<sub>r</sub>A, to a final voltage of 1.0 V and five cycles are permitted for this test, the capacity for 0.2I<sub>r</sub>A constant current shall be not less than 5h.

**6.4 Vibration**

The battery shall not cause damage to its performances when tested with the amplitude at 4mm (0.158 in) and the frequency at 1000Hz.

**6.5 Drop test**

The battery shall not cause damage to its performances when dropped to the wooden board at a height of 450mm(17.716 in).

**6.6 Safety****6.6.1 Over-discharge device operation**

Discharged for 24h with an load resistor (Load(mΩ)=1.2V×n×1000/2I<sub>r</sub>A), but no leakage nor deformation.

**6.6.2 Safety valve performance**

Test method: the batteries are discharged to 0V at 0.2I<sub>r</sub>A, then increase the current to 1I<sub>r</sub>A and maintain 1h, leakage and deformation are allowed, but no disrupt and no burst.

**6.6.3 Short circuit**

Test method: charge at 0.4I<sub>r</sub>A for 3.5h, short-circuit directly between positive pole and negative pole for 1h, no disrupt, no burst, but leakage and deformation are allowed.

## 7. USE AND MAINTENANCE

- 7.1 Battery can be charged at constant current and constant power, charge current and charge control design can refer to the provisions of 5, don't control the battery with  $-\Delta V$  for first 5min at the beginning of charge; and not advice charge the battery with constant voltage charger.
- 7.2 Too hot or too cool will reduce the capacity and life of the battery, please keep the battery at  $15^{\circ}\text{C} \sim 25^{\circ}\text{C}$  as much as possible.
- 7.3 Please refer to the provision of 5 to design discharge current and cut-off voltage, not advice to set discharge current more than the provision of 5.
- 7.4 Please contact with us when your charge/discharge current is higher than the provision of 5 or the combination quantity more than 15 pieces.
- 7.5 Short circuit, over-charge, over-discharge, reverse charge, mix using new battery with semi-used battery, excessive temperature or incinerate, strike or drop, incorrect charge method all can cause battery drop performance, seriously can cause battery to leakage, deform or explode.
- 7.6 Please store the battery in a cool and dry place; charge battery before store it; long time storage can drop battery performance until lose effectiveness; The period of guaranteeing of our battery is 6 months after the day of purchase; please maintain the storing battery every 3 months; please charge/discharge the battery 3 times according to the provision of 5.
- 7.7 Battery can charge and discharge several hundreds times, but can lose effectiveness at last. When battery's work hours shortened obviously, please buy new battery.

## 8. SUGGESTION & ADVICE

- 8.1 avoiding to weld the battery or battery pack directly.
- 8.2 If find any noise, excessive temperature or leakage from a battery, please stop its use.
- 8.3 When not using the battery, please disconnect it from the device.
- 8.4 Don't put the battery into water or fire.
- 8.5 Keep away from children. If swallowed, contact a physician at once.
- 8.6 This specification copyright belongs to HENAN HUANYU POWER SOURCE CO., LTD. No copying before permitted. We reserve the right to modify this specification.
- 8.7 We'll not be held responsible if you use battery incorrectly.
- 8.8 If necessary, please contact HUANYU for detailed information.

**TEL: 0086-373-2688006/2688085**

**0086-755-27370590**


**FAX: 0086-373-2688011**

**0086-755-27370594**

**Web-site: <http://www.huanyubattery.com>**

**TYPE: HYCP4/5SC1300N****Specifications**

Nominal voltage		1.2V	
Capacity (mAh)		0.2C <sub>5</sub> Ah <sup>[1]</sup>	
	Minimum	1300	
Diameter		23.0 <sup>0</sup> <sub>-1.0</sub> mm	
Height		34.0 <sup>0</sup> <sub>-1.5</sub> mm	
Weight <sup>[2]</sup>		About 39g	
Internal impedance <sup>[2]</sup> (1000Hz.)		≤14mΩ (After charge)	
Charge	Standard	0.1I <sub>L</sub> A	
	Rapid	1I <sub>L</sub> A	
	Trickle	Max.	0.05I <sub>L</sub> A
		Min.	0.03I <sub>L</sub> A
Ambient temperature	Charge	Standard <sup>[3]</sup>	10°C~30°C    50°F~86°F
		Rapid <sup>[4]</sup>	10°C~30°C    50°F~86°F
	Discharge <sup>[5]</sup>		-20°C~55°C    -4°F~131°F
	Storage		-20°C~25°C    -4°F~77°F

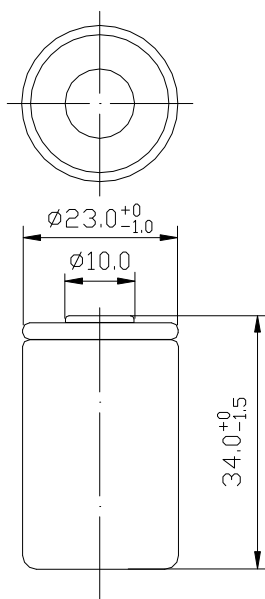**Appearance** (Contain insulating packing)**Note:**

- [1] Charge 7.5h at 0.2I<sub>L</sub>A, rest 1h, then discharge at 0.2I<sub>L</sub>A, end at 1.0V/cell, 20°C.
- [2] Weight and IR are for reference.
- [3] Charge 7.5h at 0.2I<sub>L</sub>A.
- [4] Charge 1.25h at 1.0I<sub>L</sub>A, dT/dt=1°C/3min ~2°C/3min, TCO=45°C, -ΔV=10mV/cell.
- [5] Discharge at 0.2I<sub>L</sub>A, end at 1.0V/cell.

**Typical Characteristics**