

Power-Xtra CR2450 - 3V Li-MnO2 - Buton Lithium Pil - Bulk Paket


SPECIFICATIONS OF SINGLE CELL

| | |
|------------|-----------------|
| Type | Li-MnO2 Buton |
| Stock Code | 900.600.503.221 |
| Model | CR2450 |


TECHNICAL INFORMATIONS

| Item | Specifications | Conditions |
|--|----------------|--|
| Nominal Voltage | 3.0V | |
| Typical Capacity | 550 mAh | Standard discharge with load 7,5kΩ |
| Instantaneous short-circuit current | ≥250 mA | Time≤0.5 second |
| Off-load voltage | ≥3.20 V | No load |
| Service Output - Initial | 1550 h | Continuous discharge with load 7,5kΩ, till 2.0v end-voltage, Temperature 20±2°C, under the condition of related humidity≤75%RH |
| Service Output - After 12 months storage | 1465 h | |
| Typical Weight | 5,8 gr | |
| Recommended Storage Temperature Range | 20+/-2°C | 5 years after delivery under proper storage conditions. |
| Recommended Operation Temperature Range | -20° C to 60°C | |
| Shelf Life | 3-5 Years | Recommended Storage Range : 20+/-2°C Recommended Humidity Range : 65+/-20%RH |

Discharge Characteristics

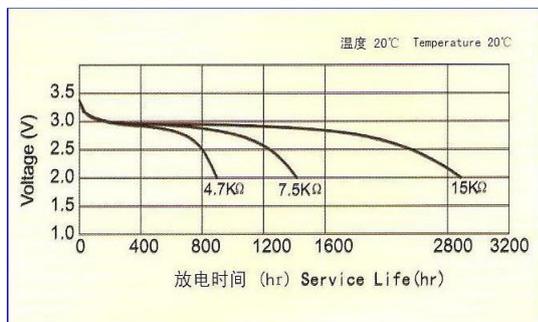


Temperature Characteristics

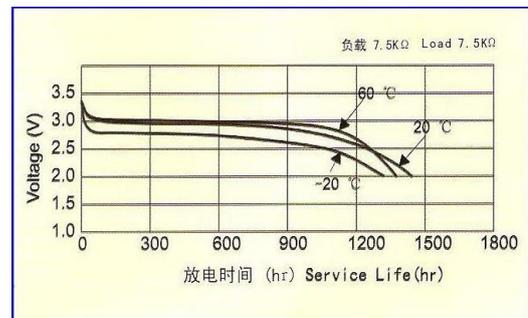


Power-Xtra CR2450 - 3V Li-MnO₂ - Buton Lithium Pil - Bulk Paket

Load Capacity

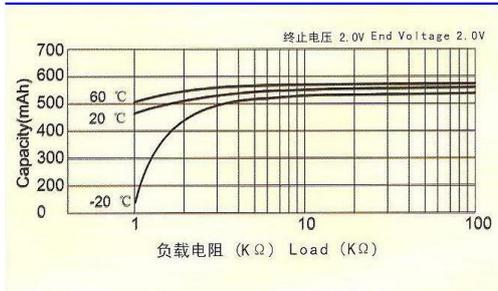


Pulse Discharge Characteristics

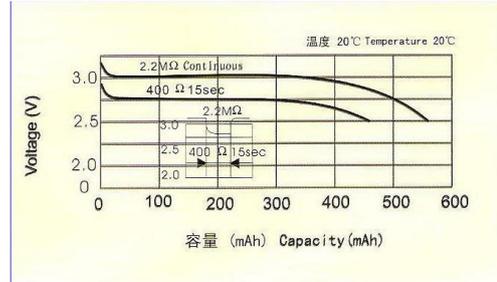

TECHNICAL INFORMATIONS

| Item | Test Methods | STANDARD | |
|-------------------------------------|--|---|---------------------|
| | | | |
| Dimension | Using vernier caliper (accuracy \geq 0.02) while avoiding short-circuit | Diameter | 24.5 (-0.20) mm |
| | | Height | 5.0 (\pm 0.1) mm |
| Off-load voltage | Using multimeter (accuracy \geq 0.25%) internal resistance \geq 1M Ω | \geq 3.20v | |
| Instantaneous short-circuit current | Time of short-circuit should be less than 0.5 second and avoid repeated test within half an hour | \geq 250 mA | |
| Appearance | Eyeballing | Bright, clean, no rust, no leakage, And no flaw | |
| Capacity | Continuously discharge for with load 7,5k Ω , temperature at 20~25°C, humidity at 65 \pm 20% till 2.0v end-voltage (for fresh battery only; within 3 months) | \geq 1550 h | |
| Vibration test | Put battery on the platform of the vibrations machine, start the machine and adjust the frequency form 10 times per minute to 15 times per minute. keep it running for an hour | Characteristics keep stability | |
| Leakage at high temperature test | Stored under temperature (50°C) for 10 days | No leakage allowed | |
| Over discharge Test | After 2.0v end-voltage, continuously discharged for 5 hours | No leakage allowed | |

Image and Technical Drawings
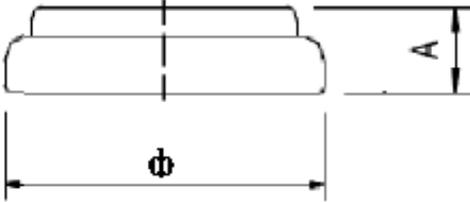
| Image | Technical Drawing | STANDARD | |
|---|--|----------|------------------------|
|  |  | Diameter | $\Phi=24.5 (-0.2)$ mm |
| | | Height | A=5.0 (± 0.1) mm |