



Power-Xtra 27A Size 12V Alkaline Battery - with 5BL / BLISTER

SPECIFICATIONS OF SINGLE CELL

Type Alkaline Battery
Model PX-27A-12V


TECHNICAL INFORMATION

Item	Specifications	Conditions
Nominal Voltage	12V	20 Ω ±0.5% Load Resistance, Measuring Time: 0.3s, Temperature: 20±2°C, Tested within 30 days after delivery.
Typical Capacity	20 mAh	22k Ω 6V Continuously discharge at 20±2°C under 20K Ω load to 6.0V end-point voltage
Typical Weight	4.5 ± 0.3g	
Recommended Storage Temperature Range	20±2°C	12 months after delivery under proper storage conditions.
Recommended Operating Temperature Range	-20° C to +45°	
Shelf Life	12 months shelf life after delivery.	Storage Conditions: 20±2°C Relative humidity: 65±15%RH. 90% of the capacity will be maintained after 1 year storage.

DISCHARGE CURVE

Discharge Curve: 20 K Ω 24h/day 6.0V 20 $\pm$ 2 $^{\circ}$ C 65 $\pm$ 15%RH.

Load Resistance : 20K Ω Discharge method : 24hrs/day E.P.V. : 6.0V Temp: 20 $\pm$ 2 $^{\circ}$ C R.H.: 60% $\pm$ 15

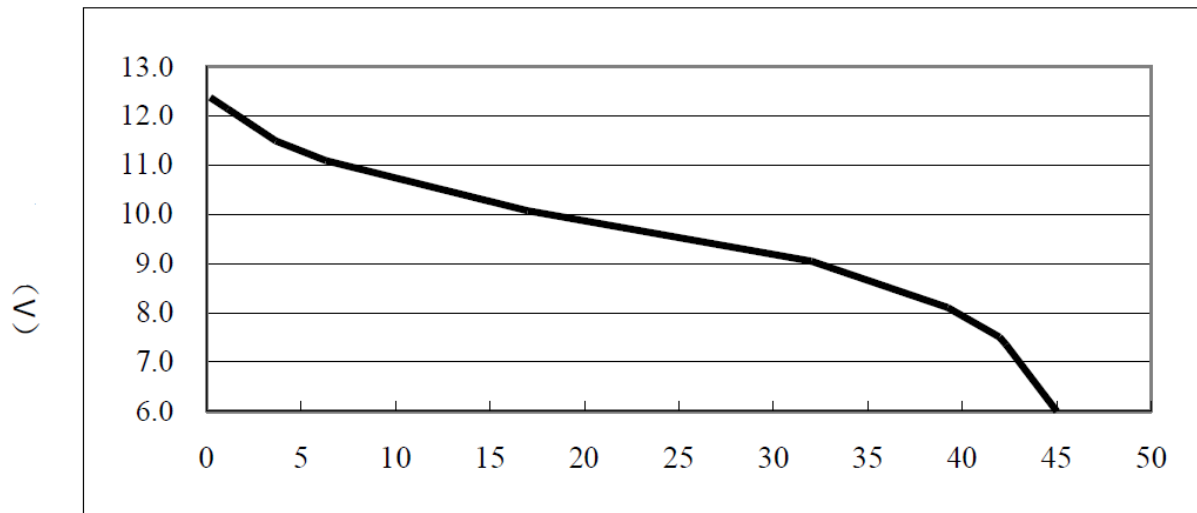

(h)

IMAGE

