



Type Designation	CR-P2
Designation IEC	CR-P2
System	Li-MnO ₂
Shelf Life *	10 years
Nominal Voltage [V]	6
Typical Capacity C [mAh]	1390 (Load 390 Ω at 20° C down to 3.6V)
Permissible Temperature Range	- 20 °C ... 70 °C
Weight, approx. [g]	38
Volume [ccm]	20.4



Dimensions [mm]

min: max:

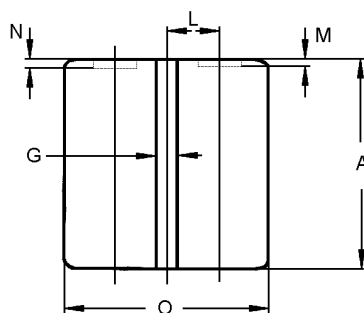


A	34.5	36.0
D	16.8	16.8
E	15.3	16.2
F	7.5	8.7
G	1.3	-
H	9.2	9.8
L	8.4	8.4
M	0.1	1.0
N	0.7	1.5
P	18.5	19.5
O	32.5	35.0

Typical Capacities (at 20°C)


Discharge Type	Load	End Voltage[V]	4.0	3.6
Pulse Test	7.5 Ω	Time [cy]	412.00	429.00
15s/m, 7d/w		Capacity [Ah]	1.15	1.19
		Energy [Wh]	5.74	5.95
Discharge Type	Load	End Voltage[V]	4.0	3.6
Service Output Test	390 Ω	Time [h]	96.00	99.00
24h/d, 7d/w		Capacity [Ah]	1.36	1.39
		Energy [Wh]	7.57	7.69

* In consideration of typical loss of capacity at storage and application.

Discontinuous 15s/m - 7.5 Ω

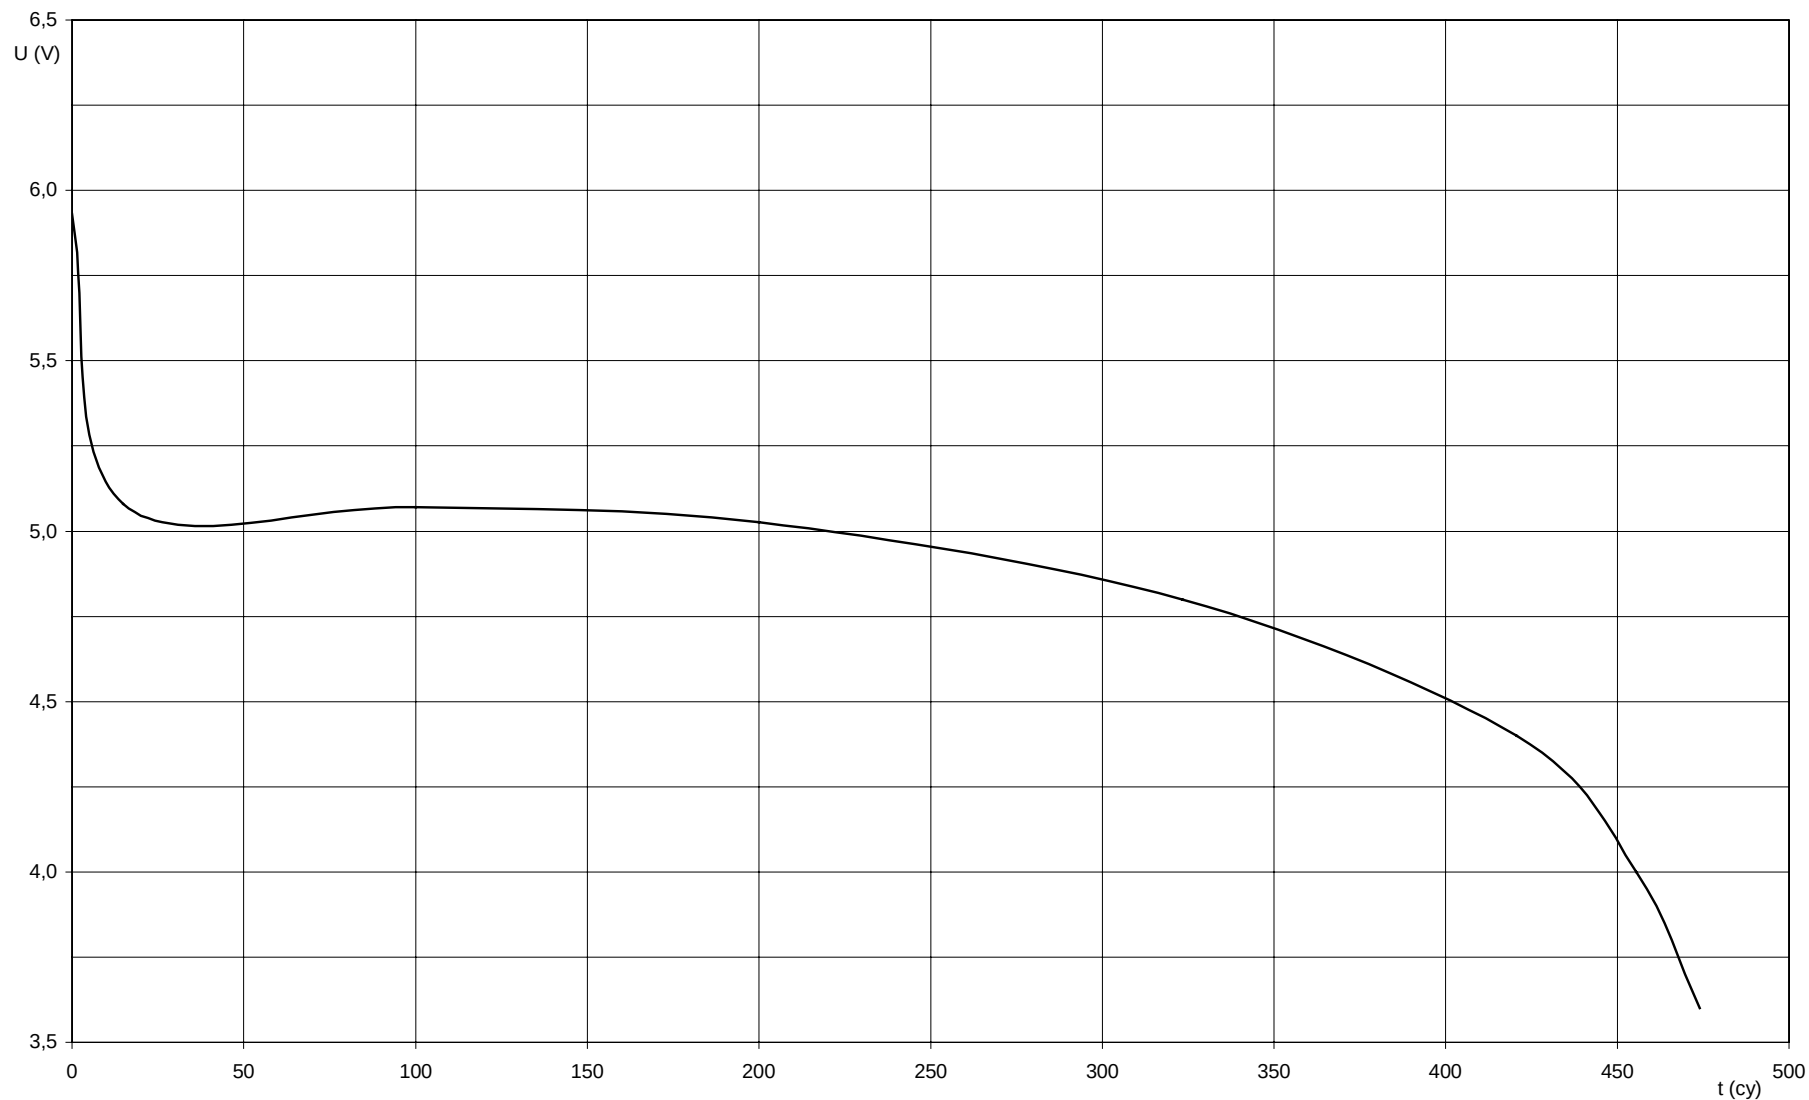

Continuous - 390 Ω

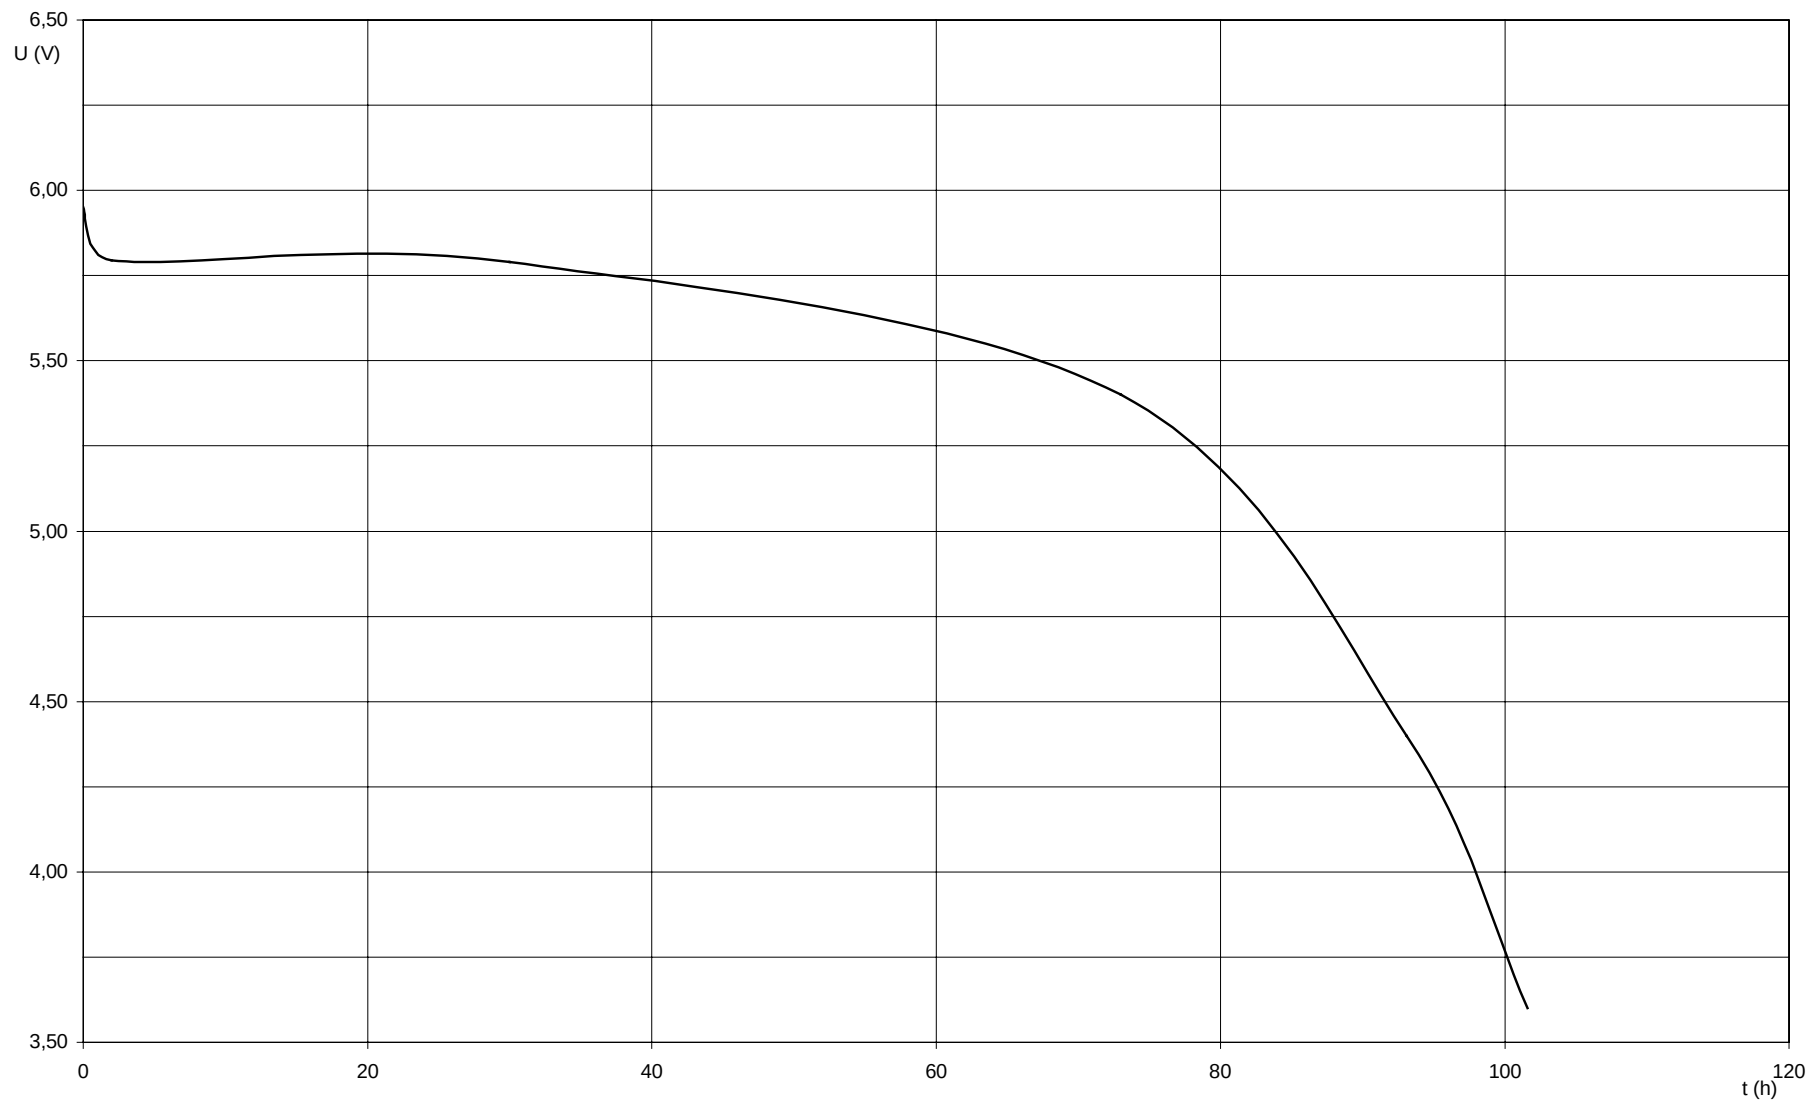

Internal Resistance at Continuous 390 Ω , 1s/1h 7.5 Ω

