

## Power-Xtra CR2430-1VCDV - 3V Lithium Li-MnO<sub>2</sub> Battery - 2 Pins - Vertical -92

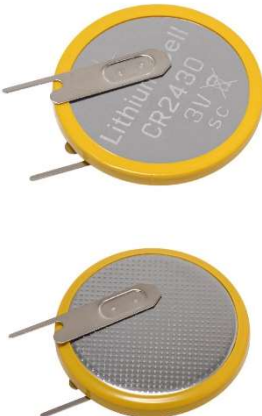
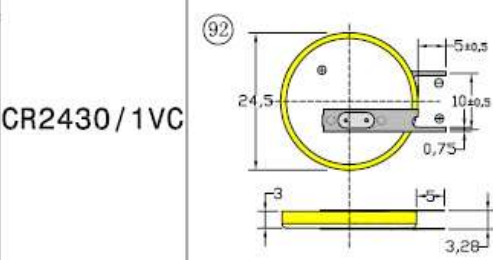
### SPECIFICATIONS OF SINGLE CELL

Type	Li-MnO <sub>2</sub> Buton with Pins
Stock Code	900.600.503.211
Model	CR2430, CR-2430, PX-CR2430-1VC

### TECHNICAL INFORMATIONS

Item	Specifications	Conditions
Nominal Voltage	3.0V	
Typical Capacity	300 mAh	Standard discharge with load 15k $\Omega$
Off-load voltage	$\geq 3.20$ V	No load
Typical Weight	4.75 gr	
Recommended Storage Temperature Range	20+/-2°C	5 years after delivery under proper storage conditions.
Recommended Operation Temperature Range	-20° C to 60°C	
Shelf Life	5-7 Years	Recommended Storage Range : 20+/-2°C Recommended Humidity Range : 65+/-20%RH

### Image and Technical Drawings

Image	Technical Drawing	STANDARD	
		Diameter	24.5 (-0.2) mm
		Height	3.2 ( $\pm 0.1$ ) mm