# **Technical specifications for li-ion battery**

Name of products:	High power Cylindrical Li-FePO4 battery
Model :	HW 38120HP
Specification :	8000mAh/3 2V

Design	Check	Audit
Jin Jianhua	Xu Aokui	Xu Aokui

2011-3-20 published

2011-3-28 implementation

### $1_{\,{}^{\,{}^{\,{}^{\,{}}}}}$ Range of application

# 2, kinds of models

2.1 kind: High power Cylindrical Li-FePO4 battery


2.2 model: HW 38120HP


# 3, technology parameter


No.	Item		specification
3-1	normal capacity		8000mAh (0.5c)
3-2	normal voltage		3.2V
3-3	Inter impedance		≤3.5mΩ
3-4	Maximum Charge Current		10C (80A)
3-5	Maximum Charge Voltage		$3.65 \pm 0.05 \text{V}$
3-6	Maximum continuous Discharge Current		20C(160A)
3-7	Maximum Discharge Current		25C (200A)
3-8	discharge stop voltage		2.0V
•	dimension	diameter	38±1mm
3-9		height	$122 \pm 1 \text{mm} (132 \pm 1 \text{mm})$
3-10	weight		Appro. 300g
2 11	Work	charge	0~45°C
3-11	temperature	discharge	-20~60°C
2 12	Stora tomporetura	In one month	-20~45℃
3-12	Store temperature	In sit month	-20~35℃

<sup>\*</sup>The battery need to be in the condition of half full charge or the voltage about 3.2-3.3

# **Dimension of battery**

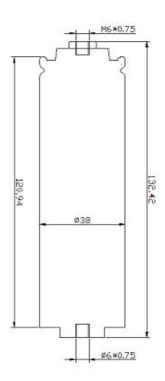

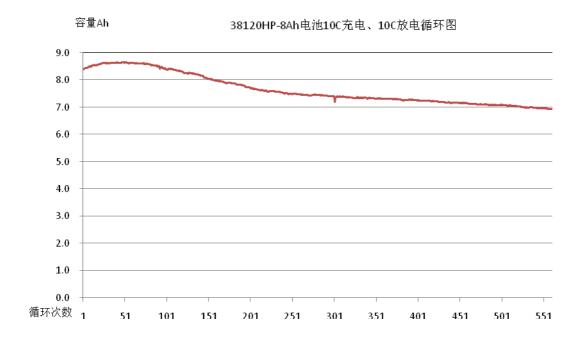

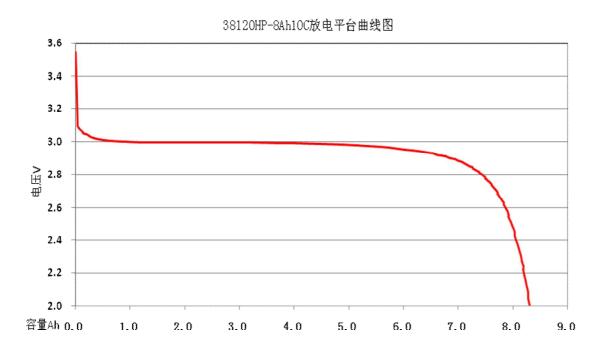

## 4. Standard test conditions

Measurements are carried out at  $20\pm5\,^{\circ}\mathrm{C}$  and relative humidity of  $65\pm20\%$ . Accuracy of voltmeters

#### 4. Test conditions

4.1 experiment and test should at the normal temperature (20 $\pm 5^{\circ}$ C) or the normal humidity (65  $\pm 20\%$ ) .

Normal charge: adopt to constant current then constant voltage: constant current is

 $0.5C(4000\,\mathrm{mA})$ , constant voltage is  $3.65\mathrm{V}$ , charge is stopped when the current low to  $160\,\mathrm{mA}$  during constant voltage process.

Normal discharge: discharge with constant current 4000mA and discharge to 2.0V.

#### 4.2 the equipments of Test

Voltmeter Impedance  $>1000 \Omega/\text{one}$ 

Ammeter total resistance (ammeter and line)  $\langle 0.01 \Omega$ 

Vernier caliper precision 0.02mm

5. Li-ion Battery Characteristics

Test item	Test conditions	Requirements
(1)Outside Appearance	Visual check	No abnormal stain, Deformation nor damage
(2) starting voltage	Starting voltage in an hour After the normal charge	≥3.3V
(3) Standard charge	Battery shall be charged continuously at the constant current of 0.2C5mA to 3.65V, then charge at the constant voltage of 3.65V until the end current of 0.01C5mA	
(4)Standard discharge	Battery shall be discharged continuously at the constant current of 0.2C <sub>5</sub> mA to 2.0V	
(5) Rated Capacity	Battery shall be charged in Item (3) and discharged in Item (4) within 10 minutes after full charged. If the discharge capacity does not reach the specified value, the test may be repeated up to three times in total.	Capacity≥8000mAh
(6)Cycle Life(20℃)	Battery shall be charged continuously at the constant current of 0.5C5mA to 3.65V then charge at the constant voltage of 3.65V until the current of 200mA and discharged continuously at the constant current of 0.5C5mA to 2.0V. A cycles defined as one charge and discharge, carry out cycles until discharge capacity $<70\%$ C5mAh.	≥2000cycles
(7) High temperature discharge	Battery shall be charged in Item (3) and discharged at the constant current of 1.0C <sub>5</sub> mA to 2.0V within 10 minutes after full charged. If the discharge	
(8)Low temperature discharge	Battery shall be stored under $-10^{\circ}\text{C}\pm2^{\circ}\text{C}$ for 4h after charged in Item (3), then discharged at constant current of 0.5C <sub>5</sub> mA to 2.0V	Capacity≥5400mAh
(9)Drop Test	Drop 100% charged test sample from 1 meter above onto concrete board with more than 5cm thickness two times each for every direction after rated charge.	No rupture, fire, smoking, Nor critical damage ≥ 90% C <sub>5</sub> mAh

	After test , cells are discharge at constant current		
	of 0.2 C <sub>5</sub> mA		
(10) W.1	Vibrate test sample for 90minutes per each of the three	No rupture, fire,	
	mutually perpendicular axis $(x, y, z)$ after rated charge.	smoke,	
(10) Vibration Test	Amplitude: 0.38mm(10-30Hz); 0.19mm (30-55Hz)	Nor critical damage	
	Frequency: 10-55Hz(loct/min)Direction: X, Y,Z.	≥90% C5mAh	
	The charged batteries are to be heated in a gravity		
	convection or circulating air oven. The temperature of		
(11)Hot Oven Test	the oven is to be raised at a rate of $5\pm2\mathrm{^{\circ}\!\!C}$ per minute.	No fire, Nor explosion	
	The oven is to remain for 30 minutes at $130\pm2^{\circ}\mathrm{C}$ before		
	the test is discontinued.		
	Battery should be tested at $20\pm5^{\circ}\mathrm{C}$ , Battery shall be		
	discharged at 1C5mA current until end voltage. then		
(12) Ouer charge	connect cathode on DC power, adjust the output current	No fine Non audlesien	
(12) Over charge	to 15I5A , output voltage shouldn't lower than	No fire, Nor explosion	
	10V .charging is continued for 7 hours or voltage will		
	not improve and the current will reached 0.		
	Battery is tested at $20\pm5^\circ\!\mathrm{C}$ , Battery discharged		
(13)Over discharge	continuously with I5A to end voltage. then Reverse	No fire, Nor explosion	
	charge 90 min. with 5I5A.		
	Battery shall be charged in item(3), Connect battery		
(14) Chart Circuit Toot	terminals with electric wire( electric resistance: 50m	No fire, Nor explosion	
(14)Short Circuit Test	$\boldsymbol{\Omega}$ or less ), short circuit , when the temperature will		
	be lower than 10, the test will be end.		
	Battery shall be charged in Item (3), and stored in		
(16) Storage	a temperature-controlled environment at $20\pm5\%$ for	Remaining capacity ≥	
characteristics	30 days. After storage, Battery shall be discharged	90%C₅mAh	
	in Item (4) to obtain the remaining capacity.		

#### 6. Remark

- 6.1 please don't let the battery near to hot, fire etc.
- 6.2 please use special charger.
- 6.3 polarity is not reversed.
- 6.4 The battery has the safe equipment, please don't dissect the battery or change the structure of battery for your safe.
- 6.5Ban to connect directly anode and cathode of battery with the metal.
- 6.6 Ban to beat or throw the battery.
- 6.7 Battery should keep it in the dry and cool place. ban to put the battery into the water
- 6.8 Charging before using if the battery haven't be used in 6 month.

#### 7. Quality guarantee period

- 7.1 quality guarantee period: 2 years from the date of original shipment.
- 7.2 our company has no responsibility, if using the battery without regulation ways,

# 5, transport

battery should avoid to Vibration, impact, exposed to the sun and rain. And battery is half-full capacity on passage.