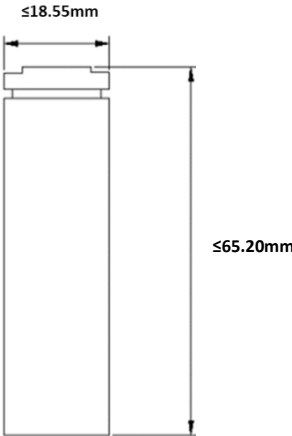


Model: PX18650-24ME 3.7V 2400mAh Li-ion-15A
Stock Code: 900.600.503.465

Item	Specifications	Conditions
Capacity	Nominal: 2400 mAh	The cut-off discharge at 2.75V when the discharge current is 0.2C after standard charge
	Minimum: 2400 mAh	
Internal Impedance	$\leq 25\text{ m}\Omega$	$25\pm 3^{\circ}\text{C}$ at 1000 Hz
Cut-off charging voltage	$4.20\pm 0.05\text{V}$	
Nominal voltage	3.6V	
Standard charging mode	CC-CV	Cut-off current is 0.02C
Charging current	0.5C	Standard charge
Max continuous discharge current	15A	Not for cycle life
Cut-off discharge voltage	2.75V	
Weight	47.0g	Max
Operating temperature	Charge: $0\sim 45^{\circ}\text{C}$	
	Discharge: $-20\sim 60\text{ }^{\circ}\text{C}$	
Storage temperature	1 year: $-20\sim 25\text{ }^{\circ}\text{C}$	
	3 months: $-20\sim 45\text{ }^{\circ}\text{C}$	
	1 months: $-20\sim 60\text{ }^{\circ}\text{C}$	

Model: PX18650-24ME 3.7V 2400mAh Li-ion-15A
Stock Code: 900.600.503.465

Item	Specifications	Representative Image
Height	≤65.20mm	
Diameter	≤18.55mm	